
STEEL GRATING · PRODUCT DATASHEET

Serrated Bar Grating

Notched bearing bar grating for wet, oily, outdoor and washdown walking areas.

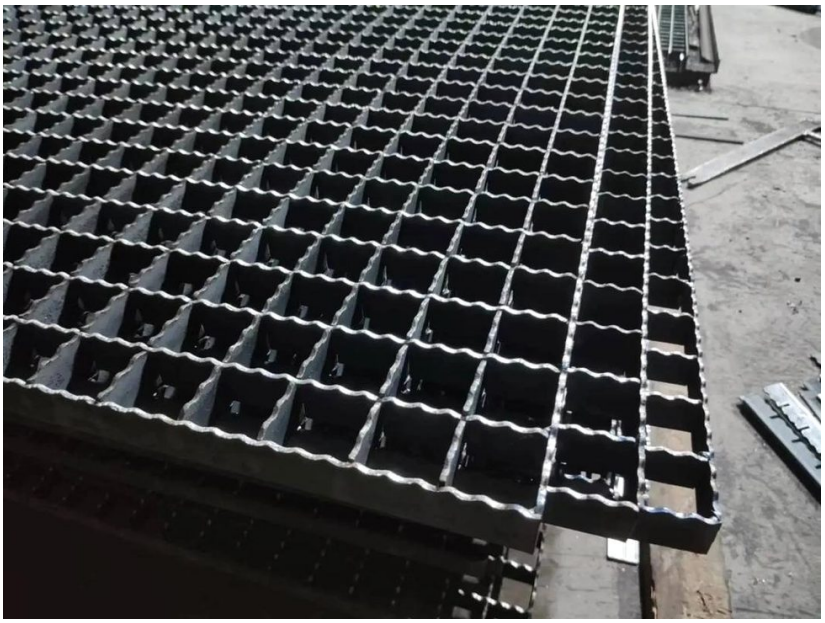

Common applications

- Wet and outdoor access areas
- Cut-to-size serrated panels
- Inspection and packing review

Supplied by drawing

Panels, sizes, finish and packing are made to your drawing, sketch or parts list and confirmed in writing before production.

Typical specifications (quotation examples)


Reference	Description
G325/30/100	32 x 5 mm serrated bearing bar for wet or oily walking areas.
G405/30/100	40 x 5 mm serrated bearing bar reviewed for longer span or heavier load.
HDG serrated	Serrated surface with hot-dip galvanized finish for outdoor platforms.
Serration direction	Bearing bar direction confirmed on drawings so the panel spans correctly.


Examples only. Final sizes, loads and finish are confirmed against your drawings and project documents.

What we confirm before quotation

Anti-slip surface	Whether notched bearing bars are required for wet, oily, outdoor or washdown areas.
Bearing direction	Mark the bearing bar direction clearly so panels span correctly across the supports.
Load and span	Support span, walking load, trolley load or other project load notes before bar selection.
Bar spacing	Bearing bar pitch and cross bar pitch to match load, drainage and walking requirements.
Finish	Hot-dip galvanizing is common for outdoor carbon steel serrated grating.
Fabrication details	Cutouts, banding, toe plates, fixing clips, side plates and panel marks on drawings.

Product and project photos

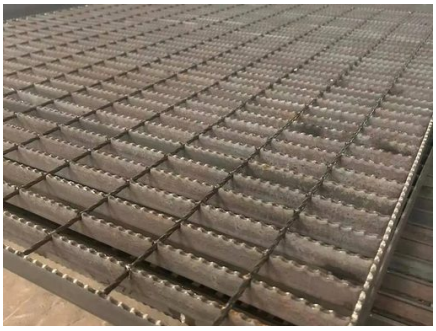

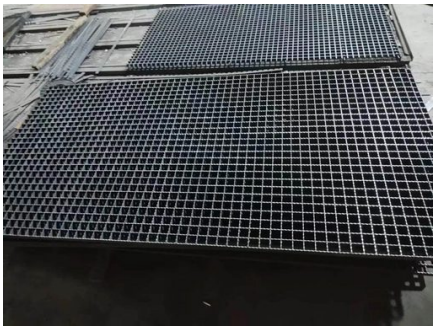



Loading for shipment

Standards and references

- Steel grating can be reviewed according to drawings and standards such as YB/T 4001.1, ANSI/NAAMM MBG 531 or BS 4592 when required.
- Hot-dip galvanizing can be specified according to ISO 1461 or ASTM A123/A123M when a defined zinc coating reference is needed.
- Platform, stair and access projects may refer to ISO 14122 or local safety requirements for walking surfaces and guardrail interfaces.
- Final specification should follow project drawings, load notes, local codes and buyer approval documents.

RFQ checklist: send these details for a faster quote

[ ]	Panel size, quantity and destination
[ ]	Bearing bar size, serrated surface and spacing
[ ]	Support span, load condition and bearing direction
[ ]	Finish, cutouts, banding, fixing clips and packing marks

Free drawing review

Send drawings, sketches or a parts list. We check sizes, materials and finish before pricing, at no cost to you.

Jin Zhu, Sales Manager · sales@qymetaltech.com · WhatsApp +86 151 5225 6390